


NEW SIZES AVAILABLE!

CC

MAX®

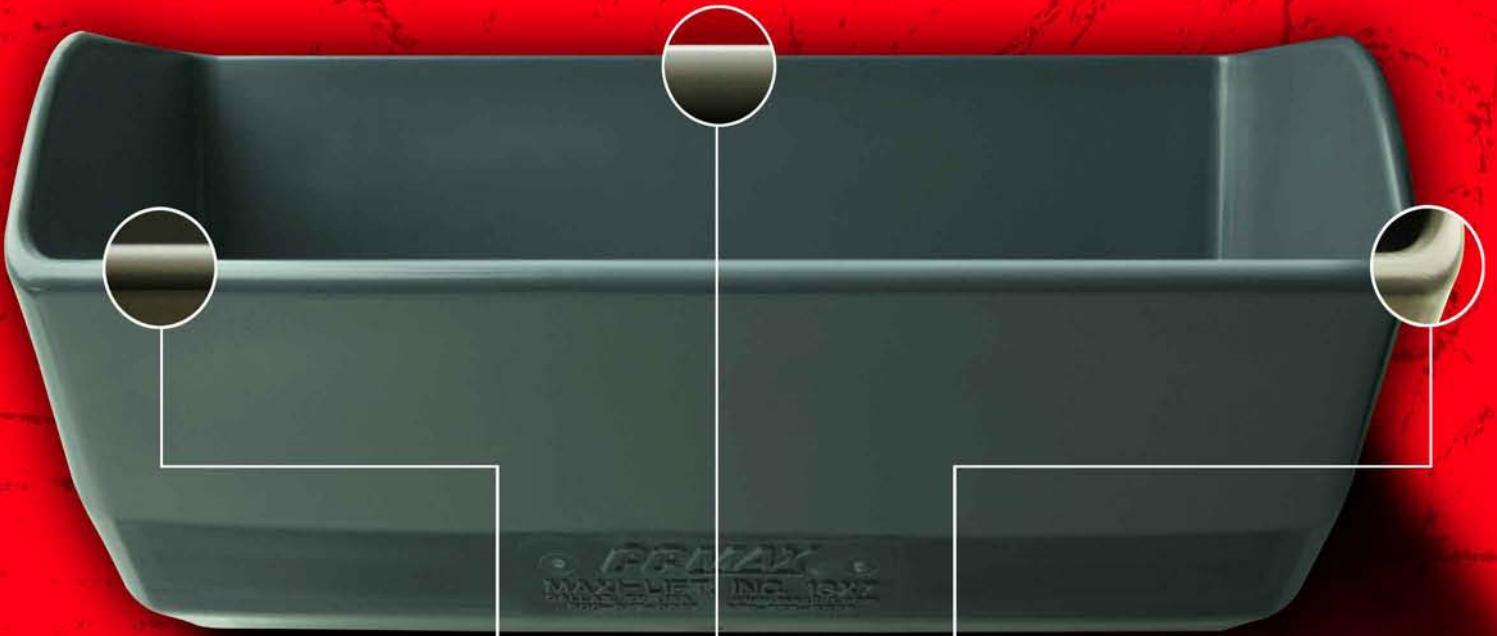

**BUILT STRONGER.
LASTS LONGER.**

Maxi-Lift Inc.®

MAXILIFT.COM 800.527.0657





CC-MAX® Elevator Bucket

High Speed Centrifugal Discharge 210 - 900 FPM


The CC-MAX Heavy Duty elevator bucket is a grade above older CC style buckets. It has the traditional shape, fill and discharge characteristics, with the thicker wear surfaces our buckets are famous for. The result is longer life and greater performance. CC-MAX buckets are direct replacements for CC and other standard bucket styles. Standard spacing is nominal projection plus 2" inches. Exceptional performance in most agricultural applications.

Features

- Thicker lip - up to 20%
- Thicker corners - up to 20%
- More capacity - up to 5%
- Clean discharge
- High impact and abrasion resistant
- Non-corrosive non-sparking

Benefits

- Longer bucket life
- Increase and maintain capacity longer
- Move bulk materials faster
- Decreases elevator down-time
- Corrosion resistant
- Lowers freight rates by efficient packaging
- Resists hang-ups

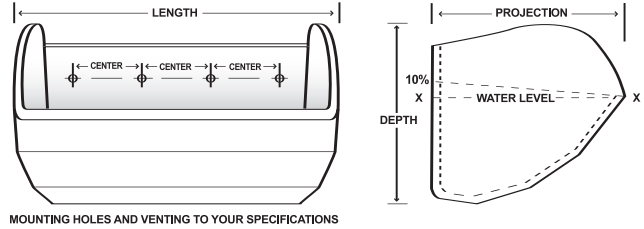

CC-MAX® Elevator Bucket

CC-MAX® LOW PROFILE

BUCKET SIZE, INCHES**					PUNCHING, INCHES			WEIGHT, LBS.	CAPACITY, CU. INCHES			
Bucket Size	Length	Proj.	Depth	Backwall Thickness	Centers	Number of Holes	Bolt Size	(Poly) H.D.P.E.	Water Level X-X	Water Level +10%	Standard Spacing	Carton Qty
5 x 4	5-1/2	4-1/2	4-1/4	0.21	3-3/16	2	1/4	0.53	38.30	42.13	6	30
6 x 4	6-1/2	4-1/2	4-1/4	0.21	4-3/8	2	1/4	0.58	45.38	49.92	6	30
7 x 4	7-1/2	4-1/2	4-1/4	0.21	2-11/16	3	1/4	0.65	52.10	57.31	6	30
6 x 5	6-1/2	5-1/2	5	0.26	4-3/8	2	1/4	0.89	70.87	77.96	7	16
7 x 5	7-1/2	5-1/2	5	0.26	2-11/16	3	1/4	0.99	80.75	88.83	7	14
8 x 5	8-1/2	5-1/2	5	0.26	3-1/16	3	1/4	1.10	90.85	99.94	7	24
9 x 5	9-1/2	5-1/2	5	0.26	3-5/8	3	1/4	1.18	100.99	111.09	7	24
8 x 6	8-9/16	6-5/8	6	0.27	3-1/16	3	1/4	1.40	136.00	149.60	8	18
9 x 6	9-9/16	6-5/8	6	0.27	3-5/8	3	1/4	1.52	149.19	164.11	8	18
10 x 6	10-9/16	6-5/8	6	0.27	4-1/8	3	1/4	1.64	166.89	183.58	8	18
11 x 6	11-9/16	6-5/8	6	0.27	3	4	1/4	1.73	180.62	198.68	8	18
12 x 6	12-9/16	6-5/8	6	0.27	3-3/8	4	1/4	1.91	200.76	220.83	8	18
13 x 6	13-9/16	6-5/8	6	0.27	3-5/8	4	1/4	2.13	215.00	236.50	8	18
10 x 7	10-9/16	7-7/8	7	0.32	4-1/8	3	5/16	2.35	236.00	259.60	9	12
11 x 7	11-9/16	7-7/8	7	0.32	3	4	5/16	2.44	247.74	272.52	9	12
12 x 7	12-9/16	7-7/8	7	0.32	3-3/8	4	5/16	2.63	267.27	293.99	9	12
13 x 7	13-9/16	7-7/8	7	0.32	3-5/8	4	5/16	2.78	288.12	316.93	9	12
14 x 7	14-9/16	7-7/8	7	0.32	3	5	5/16	2.94	303.57	333.93	9	12
15 x 7	15-9/16	7-7/8	7	0.32	3-1/4	5	5/16	3.10	335.00	368.50	9	12
16 x 7	16-9/16	7-7/8	7	0.32	2-7/8	6	5/16	3.29	350.87	385.95	9	12
12 x 8	12-9/16	8-7/8	8-1/4	0.35	3-3/8	4	5/16	3.25	373.00	409.00	10	9
14 x 8	14-9/16	8-7/8	8-1/4	0.35	3	5	5/16	3.76	435.07	478.58	10	9
16 x 8	16-9/16	8-7/8	8-1/4	0.38	2-7/8	6	5/16	4.30	515.62	567.18	10	9
18 x 8	18-9/16	8-7/8	8-1/4	0.39	3-1/8	6	5/16	4.79	580.61	638.67	10	9
20 x 8	20-9/16	8-7/8	8-1/4	0.42	3-1/2	6	5/16	5.85	655.00	720.00	10	9

SIZE	CAPACITY	
Depth	Minimum Spacing	Water Level +5%
2-3/4	3	40.22
2-3/4	3	47.65
2-3/4	3	54.70
3-3/4	4	74.41
3-3/4	4	84.79
3-3/4	4	95.39
3-3/4	4	106.04
4-3/4	5	142.80
4-3/4	5	156.65
4-3/4	5	175.23
4-3/4	5	189.65
4-3/4	5	210.79
4-3/4	5	225.75
5-3/4	6	247.80
5-3/4	6	260.13
5-3/4	6	280.63
5-3/4	6	302.53
5-3/4	6	318.75
5-3/4	6	351.75
5-3/4	6	368.41
6-3/4	7	391.65
6-3/4	7	456.83
6-3/4	7	541.40
6-3/4	7	609.64
6-3/4	7	688.00

* Actual dimensions may vary slightly on all elevator buckets, depending on specified raw material.

■ - Indicates HD-MAX and CC-MAX punch patterns differ.

■ - Indicates new sizes.

PATENT PENDING

Call for Additional Sizes.