

# ACCESSORIES

## PARTS & ACCESSORIES

ELEVATOR BOLTS  
Stainless, Carbon and Zinc-Plated Steel



UHMW DRAG  
CONVEYOR FLIGHTS  
Standard and Custom Designs



SCREW CONVEYOR  
HANGER BEARINGS



MAXI-SPLICE BELT  
FASTENING SYSTEM



**Maxi-Lift Inc.**






# ELEVATOR BOLTS

Same Day Shipping Available

Maxi-Lift exceeds all industry standards for grade 2 elevator bolts.

PARTS & ACCESSORIES: BOLTS & ACCESSORIES

## STANDARD ELEVATOR BOLT




Standard #1  
Norway

- Carbon Steel
- Stainless Steel
- Zinc Plated




## SABRE-TOOTH™ ELEVATOR BOLT




Sabre-Tooth®

- Carbon Steel
- Stainless Steel
- Zinc Plated



## RELIANCE ELEVATOR BOLT

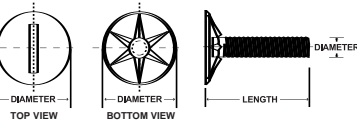


#3 Slotted  
Head

- Carbon Steel
- Zinc Plated



## HEX HEAD BOLT



Hex-Head®

- Zinc Plated
- Grade 5
- Used with Chain Attachments



Maxi-Lift continually applies metallography tests to our fasteners to ensure the finest quality parts are upheld. ASTM certificates are on file and available upon request.

STANDARD ELEVATOR BOLT			
Size, Inches	Weight /100 pcs., lbs.	Case Qty	Keg Bulk Qty
1/4 x 3/4	2.94	1200	2000
* 1/4 x 1	3.24	1200	1700
* 1/4 x 1-1/4	3.43	1200	1500
* 1/4 x 1-1/2	3.73	1200	1300
1/4 x 1-3/4	3.98	1200	1200
1/4 x 2	4.29	1200	1000
1/4 x 2-1/4	4.88	600	900
1/4 x 2-1/2	4.92	600	800
5/16 x 3/4	4.76	1200	1200
* 5/16 x 1	5.05	1200	1000
* 5/16 x 1-1/4	5.55	1200	900
* 5/16 x 1-1/2	6.38	600	800
5/16 x 1-3/4	6.50	600	700
* 5/16 x 2	7.12	600	600
5/16 x 2-1/4	7.43	600	550
5/16 x 2-1/2	7.78	600	500
3/8 x 1-1/4	6.54	600	750
3/8 x 1-1/2	7.10	600	700
3/8 x 1-3/4	7.66	600	600
* 3/8 x 2	8.31	600	500
3/8 x 2-1/4	9.35	600	450
3/8 x 2-1/2	9.83	600	400
3/8 x 3	10.79	600	300

SABRE-TOOTH ELEVATOR BOLT			
Size, Inches	Weight /100 pcs., lbs.	Case Qty	Keg Bulk Qty
1/4 x 3/4	2.94	1200	2000
* 1/4 x 1	3.24	1200	1700
* 1/4 x 1-1/4	3.43	1200	1500
* 1/4 x 1-1/2	3.73	1200	1300
1/4 x 1-3/4	3.98	1200	1200
* 1/4 x 2	4.29	1200	1000
1/4 x 2-1/4	4.88	600	900
1/4 x 2-1/2	4.92	600	800
5/16 x 3/4	4.76	1200	1200
* 5/16 x 1	5.05	1200	1000
* 5/16 x 1-1/4	5.55	1200	900
* 5/16 x 1-1/2	6.38	600	800
* 5/16 x 1-3/4	6.50	600	700
* 5/16 x 2	7.12	600	600
5/16 x 2-1/4	7.43	600	550
5/16 x 2-1/2	7.78	600	500
3/8 x 1-1/4	6.54	600	750
3/8 x 1-1/2	7.10	600	700
3/8 x 1-3/4	7.66	600	600
* 3/8 x 2	8.31	600	500
3/8 x 2-1/4	9.35	600	450
3/8 x 2-1/2	9.83	600	400
3/8 x 3	10.79	600	300

RELIANCE ELEVATOR BOLT			
Size, Inches	Weight /100 pcs., lbs.	Case Qty	Keg Bulk Qty
1/4 x 3/4	2.7	1200	2400
1/4 x 1-1/4	3.0	1200	1800
1/4 x 1-1/2	3.5	1200	1800
5/16 x 1-1/4	4.9	1200	1200


HEX HEAD BOLTS			
Size, Inches	Weight /100 pcs., lbs.	Case Qty	Keg Bulk Qty
1/2 X 1	8.50	1200	1700
1/2 x 1-1/4	9.45	1200	1500
1/2 x 1-1/2	10.70	1200	1300
3/8 x 1	4.15	1200	1700
3/8 x 1-1/4	4.80	1200	1500
3/8 x 1-1/2	5.65	1200	1300

\* Available in 302 Stainless Steel

# WASHERS, NUTS AND SPACERS


Same Day Shipping Available

## ACCESSORY PACK


HEX NUT, FLAT & LOCK WASHER				
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.	
	1/4	100	2.2	
	5/16	100	3.5	
	3/8	100	5.2	
	1/2	100	8.9	

Available in zinc and stainless.


## NUTS

STANDARD HEX			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4-20	100	.7
	5/16-18	100	1.1
	3/8-16	100	1.6
	1/2	100	3.8


Available in zinc and stainless.

STANDARD FLANGE SERRATED LOCK			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4-20	100	.9
	5/16-18	100	1.2
	3/8-16	100	1.8

Available in zinc and stainless.

LARGE FLANGE SERRATED LOCK			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4-20	100	1.2
	5/16-18	100	2.3
	3/8-16	100	2.8

Available in zinc.

NYLON INSERT LOCK			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4-20	100	.8
	5/16-18	100	1.1
	3/8-16	100	2.8

Available in zinc and stainless.

### Directions for Proper Elevator Bolt Torque on Bolt

1. To tighten the nuts, use a torque wrench that will "click" out when proper setting is reached.
2. Run the elevator with the buckets empty for 4 hours.
3. Check all bolts to insure that the proper torque is maintained.


### RECOMMENDED TORQUE FOR ELEVATOR BOLTS

SHANK DIAMETER	STEEL			STAINLESS		
	in. / lbs.	kgm / m.	ft. / lbs.	in. / lbs.	kgm / m.	ft. / lbs.
1/4"	50	.57	4	86	.99	7.16
5/16"	96	1.10	8	177	2.04	14.75
3/8"	180	2.07	15	-	-	-


\*\*Do not exceed recommended torque values, as this could strip the bolts.

### Recommended Bucket Installation


\*A locking device should be used on all elevator bucket installations.




## WASHERS AND SPACERS

FLAT				
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.	O.D. INCHES
	1/4	100	1.3	1-1/4
	5/16	100	2.0	7/8
	3/8	100	3.0	1
	1/2	100	3.8	1-3/8


Available in zinc and stainless.

SPLIT RING LOCK			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4	100	.2
	5/16	100	.4
	3/8	100	.6
	1/2	100	1.4


Available in zinc and stainless.


EXTERNAL TOOTH LOCK			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4	100	.7
	5/16	100	.7
	3/8	100	.7

Available in zinc and stainless.


FENDER				
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.	O.D. INCHES
	1/4	100	1.3	1-1/4
	Large 1/4	100	1.3	1-1/4
	5/16	100	2.0	7/8
	Large 5/16	100	3.0	1-1/2
	3/8	100	3.0	1
	1/2	100	3.8	1-3/8

Available in zinc and stainless.

LEATHER			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4	100	.3
	5/16	100	.3
	3/8	100	.3

POLY SPACERS			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4	100	2.0
	5/16	100	1.8

Available in 1/4" and 1/2" thick.

NEOPRENE			
	SIZE INCHES (ID)	PKG. QTY., PCS.	PKG. WEIGHT, LBS.
	1/4	100	1.1
	5/16	100	1.1
	3/8	100	1.1

Available in 1/4" thick.

**\*When installing urethane buckets always use Fender Washers.**





# MAXI-SPLICE BELT FASTENING DEVICE

Same Day Shipping Available

PARTS & ACCESSORIES: MAXI-SPLICE®



## Splices

### MAXI-SPLICE AB

- Non-ferrous metal of very high tensile strength
- Usable on belts of up to 800 PIW tensile
- Non-sparking, non-corroding and non-rusting
- Bronze color
- Weight: 2.9 lbs. each

### MAXI-SPLICE CI

- Ferrous metal of moderately high tensile strength
- Usable on belts of up to 600 PIW tensile
- Silver color
- Weight: 2.6 lbs. each

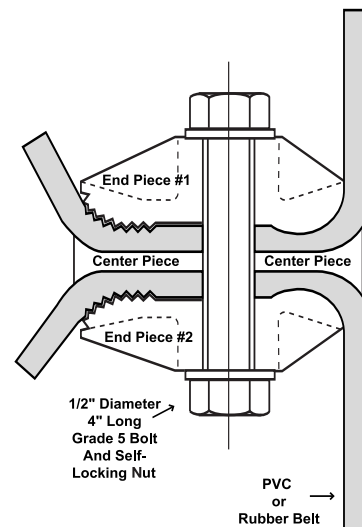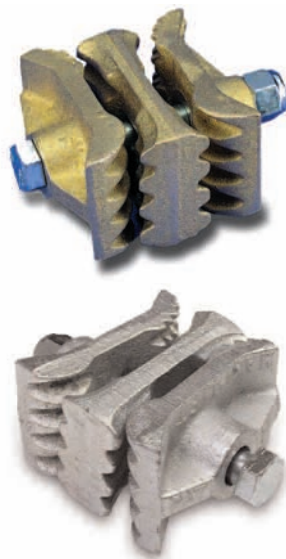

## DESCRIPTION

- The Maxi-Splice is a mechanical clamping device with a simple three-piece construction. The design is for use on PVC and rubber belting.
- Use 4" long bolts for belts up to 1/4" thick.
- Use 4 1/2" long bolts for belts between 1/4" and 1/2" thick.
- Use 5" long bolts for belts between 1/2" and 5/8" thick.
- Maximum operating temperatures: **AB: 500°F, CI: 600°F.**
- Each splice set accommodates two inches of belt width.
- It is tested and approved by leading manufacturers of PVC and rubber belting.

## INSTALLATION

1. First ensure the belt ends are square and even. If using the splice template tape, apply the tape to mark the punching. Be sure to apply the tape squarely on the belt ends; then proceed to Step 4. If you are not using the tape, go to Step 2.
2. Draw a line approximately 4-1/4" from the belt end to use as the center line for hole punching. Proper installation for even width belts will begin just inside the belt edge. Odd belt widths require installation 1/2" from the belt edge.
3. Use the Maxi-Splice as a template to mark the hole locations for punching. After marking the first hole, move over 2" and mark each consecutive hole.
4. Punch both belt ends for 1/2" diameter bolts.
5. The two end plates and center plate are used for firm belt gripping. The end plates have two gripping areas – the slotted gripping area is mounted toward the face of the belt and is followed by a series of gripping teeth. These teeth are always mounted toward the tail of the belt. The center plate is symmetrical and cannot be improperly installed.
6. **IMPORTANT:** We have supplied a 1/2" diameter, 4" long Grade 5 bolt and nylon locking nut. The bolts must be torqued for Maxi-Splice to effectively clamp. The torque requirement is 75 foot pounds for belts up to and including 600 PIW - belts greater than 600 PIW tensile require 100 foot pounds of torque.
7. Run the belt for thirty minutes; stop the leg and re-torque the bolts.
8. When reinstalling the Maxi-Splice always use new Nylock nuts.

## WARNING: Do Not Use Maxi-Splice on Manlifts!

- Maxi-Lift, Inc. and Dura-Buket, Co neither solicits nor recommends the use of the Maxi-Splice CI or AB belt clamp in splicing man lift belts. The Maxi-Splice was not designed for or tested for this purpose. Any installation of the Maxi-Splice in this application may cause serious harm or even death. Do not use on steel cable belts.
- Do not re-use nylock nuts on Maxi-Splices. When reinstalling splices, please use new nylock nuts. Replacements are available from Maxi-Lift.
- The AB and CI Maxi-Splice is not recommended for use on a standard wing pulley. It may cause premature wear on the backside of the belt around the splice. It may also create noise in the boot section of the bucket elevator as the metal splice may contact the wings of the pulley. The AB and CI Maxi-Splice may be used on a spiral wing pulley.

Call Today: 1-800-527-0657 or Visit Us Online at: [www.maxilift.com](http://www.maxilift.com)  
 16400 Midway Rd Dallas, TX 75001 • Ph: (972)735-8855 Fx: (972)735-8896 • [info@maxilift.com](mailto:info@maxilift.com)

# MAXI-SPLICE BELT FASTENING DEVICE

Same Day Shipping Available

## Template Tape and Power Punch

### TEMPLATE TAPE - FREE

- Peel and stick directly on belt
- Improves belt-punching convenience
- Marks hole locations for odd or even width belts
- Clearly marked in white and red lettering
- Included with every splice order

### POWER PUNCH

- Made with durable heat treated carbon-steel
- Reinforced blade easily cuts 1/2" diameter holes
- Impact adapter available when necessary
- Use with a hand-held mallet, impact wrench, or drill
- Always wear eye protection




ILLUSTRATION DEPICTS USAGE ON AN 8 INCH BELT.



### ADDITIONAL INFORMATION

Maxi-splice is a patented mechanical splice device for use on most elevator belts (PVC and rubber). To accommodate various PIW belt tension ratings, Maxi-splice is available in two different metals. The Maxi-Splice "CI" is ferrous metal of moderately high tensile strength and can be used on belts up to 600 PIW. The Maxi-Splice "AB" is a non-ferrous metal of very high tensile and shear strength. The Maxi-Splice "AB" does not rust or corrode and is non-sparking. Maxi-Splice "CI" and Maxi-Splice "AB" are identical in appearance with the exception that the "AB" Maxi-Splice exhibits a bronze color. The CI and AB should never be intermixed, as reduction in clamping power may occur.

Each splice unit is made of three pieces. Two are identical outside plates; the third is a center plate with an elongated center hole. The outside plates and the center plate are "mating" parts with peaks and valleys opposite of each other for firm gripping.

The outside plates have two different gripping areas. The ribbed gripping area is mounted towards the face of the belt. The opposite end has a series of both longitudinal and axial "teeth." The teeth are always mounted at the tail of the belt; they too have opposite peaks and valleys in the center plate for firm holding. The center plate is symmetrical and cannot be improperly installed around its elongated center hole.

The splice functions by using the tension supplied by the belting. This tension on the belt ends pulls the outer plates apart, and forces gripping pressure towards the teeth on the splice unit. The greater the belt tension, the more pressure is exerted on the gripping teeth at the forward end of the splice. The splice is held together by a 1/2" diameter, grade 5 bolt. The length of the bolt varies depending on belt thickness. If for any reason bolt replacement ever occurs, a grade 5 or better bolt must be used, with a nylon insert locking nut.

The clamping, holding force of the splice can only be facilitated after the grade 5 bolt is torqued during installation. Minimum torque of 75ft. lbs is required on the Maxi-Splice "CI." A 100ft. lbs torque minimum is required on the Maxi-Splice "AB." A torque wrench is required for proper installation. After installation is complete the belt must be run under load, for 30 minutes, then, each bolt must be re-torqued.

Each Maxi-Splice set will connect approximately 2" of belt width. On a 36" wide belt for example, 18 Maxi-Splice sets are required. See the Maxi-Splice installation sheet for proper use of the template tape or for placement and belt punching suggestions.

The Maxi-Splice has been tested and approved by leading manufacturers of both PVC and rubber elevator belts.

A complete Maxi-Splice set weighs 2.5 pounds.

### INSTALLATION PHOTOS





PARTS & ACCESSORIES: MAXI-SPLICE®



OTHER SIZES AVAILABLE ON REQUEST.

DIMENSIONS				
A	B	C	D	E
1-1/2	2-3/16	2-1/2	1-7/8	1-9/16
2	2-3/4	3-1/8	1-15/16	1-9/16
2-7/16	3-1/4	3-11/16	2-15/16	2-3/8
3	4	4-3/8	2-15/16	2-1/4
3-7/16	4-3/4	5	3-3/16	3-1/16



SCREW CONVEYOR

### STYLE "A" BEARING: STYLE 226

Two-piece double flange bearing for screw conveyor hanger with formed strap. This hanger bearing is interchangeable with the following styles: 20A, 20B, 26B, 28A, 30, 50, 220, 226 228 and 326.

\*HANGER STRAP NOT INCLUDED


MAXI-LIFT HANGER BEARINGS	PLASTECH	WEARITE*	UHMW	WOOD
MATERIAL	Engineered nylon resin	Engineered nylon resin	Polyethylene	Maple
GRADE	Food grade, FDA	Industrial grade	Food grade, FDA	Industrial grade
METHOD OF MANUFACTURE	Injection molded	Injection molded	Machined or molded	Machined
TEMPERATURE OPERATING RANGE	-60°F to +300°F	-60°F to +300°F	-22°F to +180°F	-50°F to +160°F
LUBRICANT	Built-in lubricant	Built-in lubricant*	Natural	Oil impregnated
COLOR	Tan	Black	White	Brown

\*Wearite bearings available drilled and tapped for lubing or purging pipes at additional cost.

### STYLE "B" BEARING: STYLE 18B

Cap type half bearing for screw conveyor hanger with U-bolt construction. Hanger Styles 17, 18, 18A, 18B, 19B and 40. Available in wood and UHMW.

\*HANGER STRAP NOT INCLUDED




DIMENSIONS				
A	B	C	D	E
3	3-7/8	4-13/16	2-7/8	13/16
3-7/16	4-7/16	5-3/8	3-13/16	7/8


### STYLE "C" BEARING: STYLE 216

Two piece bearing with rectangular upper half and double flange lower half for Hanger Styles 16, 16B, 16C, 24, 24A, 24B, 28, 216, 216B, 216C, 216F, 230 and 316. Available in wood and UHMW. Call for sizes and dimensions.

\*HANGER STRAP NOT INCLUDED



# UHMW SHEET MATERIAL SPECIFICATIONS

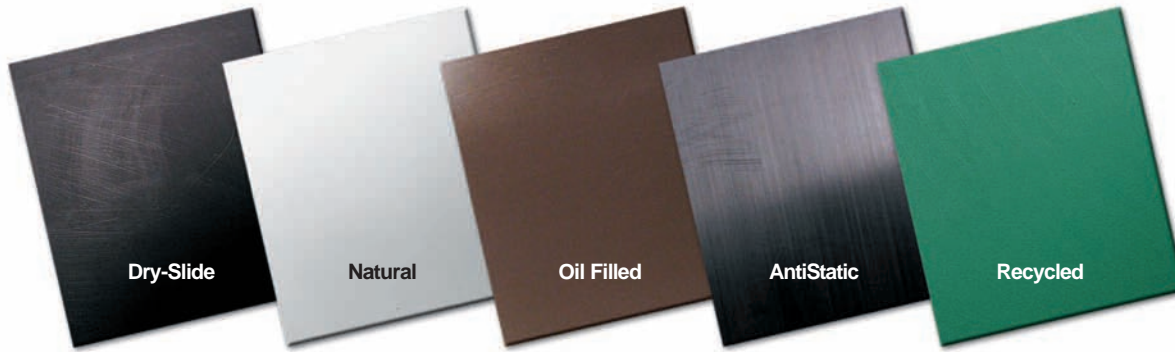

Natural UHMW – White in color. This UHMW sheet meets FDA/USDA and 3-A dairy guidelines. It is an excellent high wear material.

Reprocessed or Recycled UHMW – Green or Black in color. This sheet is a blend of virgin and regenerated UHMW polymers that maintain an acceptable combination of properties for less demanding applications. This sheet is not FDA approved.

AntiStatic UHMW – Black in color. This UHMW sheet protects parts sensitive to build up of static electricity. It permits partial transmission of electrical charge, thus dissipating static build-up. It provides a slick surface.

Dry-Slide UHMW – Black in color. This UHMW sheet is modified with special dry additives for enhanced coefficient of friction and antistatic properties. This is an effective sheet in dusty environments where components need lubrication without build-up.

Oil Filled UHMW – Brown in color. This UHMW sheet meets FDA/USDA guidelines for food and pharmaceutical handling. It has an oil additive to lubricate mating surfaces. This Oil Filled UHMW is used in closed loop continuous chain applications. It is not recommended for dusty applications.

PRIME UHMW POLYETHYLENE SHEETING (PER SHEET) 48" X 120"		
GAUGE, INCHES	WEIGHT, LBS./SHEET	TOLERANCE
1/16"	13	+/- 10%
1/8"	25	+/- 10%
3/16"	38	+/- 10%
1/4"	50	+/- 10%
3/8"	75	+/- 10%
1/2"	100	+/- 10%
5/8"	125	+/- 10%
3/4"	150	+/- 10%
1"	200	+/- 10%
1-1/4"	250	+/- 10%
1-1/2"	300	+/- 10%
1-3/4"	350	+/- 10%
2"	400	+/- 10%
2-1/2"	500	+/- 10%
3"	600	+/- 10%
3-1/2"	700	+/- 10%
4"	800	+/- 10%


Temperature Range: Continuous -22° F to +180° F





# DRAG CONVEYOR FLIGHTS

Common Sizes and Styles In Stock for Immediate Delivery

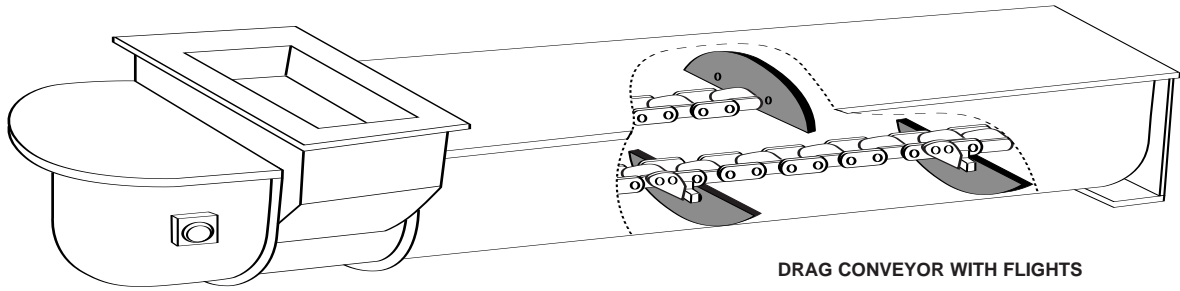

DRAG CONVEYOR WITH FLIGHTS

DRAG CONVEYOR FLIGHTS						
FLIGHTS:						
SIZE, INCHES (LENGTH AND THICKNESS)	SCREW CONVEYOR SUPERFLO	ESSMUELLER COMPANY PEERLESS	THOMAS CONVEYOR FLI-CON	JEFFERY MULTI-FLOW	EHRSAM DRACON	ENMASSE
6 X 1/4	X	-	-	X	-	X
6 X 3/8	X	-	X	-	X	X
9 X 1/4	X	-	-	X	-	X
9 X 3/8	X	X	-	X	X	X
9 X 1/2	X	X	X	-	-	X
10 X 3/8	-	-	-	-	-	X
10 X 1/2	-	-	-	-	-	X
12 X 3/8	X	X	-	X	X	X
12 X 1/2	X	X	X	-	-	X
14 X 3/8	X	X	-	X	X	X
14 X 1/2	X	X	-	-	-	X
16 X 3/8	X	X	-	X	-	X
16 X 1/2	X	X	X	-	-	X
18 X 3/8	X	-	-	X	-	X
18 X 1/2	X	X	-	-	-	X
20 X 1/2	-	X	-	X	-	X
20 X 5/8	-	-	X	-	-	X
24 X 1/2	-	X	-	X	-	X
24 X 5/8	-	-	X	-	-	X

\* Photos of drag conveyor flights are representations of flights. Actual flights may vary in size and shape.

## Specifications:

**Material:** Virgin Ultra High Molecular Weight (UHMW) polyethylene is white. Reprocessed UHMW polyethylene is green or black. Static reduced UHMW is black. UHMW has a thickness tolerance of +/- 10%.

**Style:** Drag conveyor flights are fabricated to original manufacturer's design. Cut edges are square unless otherwise noted.


**Custom Flights:** Non-standard flights can be custom fabricated to your specifications. Please send print or sample for fabrication of flight.

**Temperature:** -22° F to +180° F or -51° C to +82° C

**Ordering:** Before ordering, please note manufacturer design, number of flights, size and thickness. If a custom drag conveyor flight is required, please have sample or drawing available.


# CUSTOM DRAG FLIGHTS

Complete and Fax for a Custom Quote

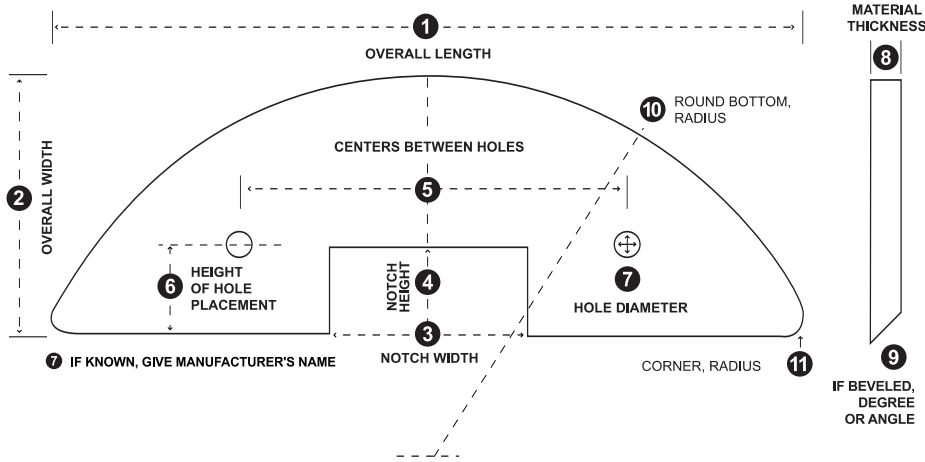

## Round Bottom Flights

Round bottom flights are standardized according to conveyor manufacturer. Most common sizes and styles are stocked for immediate shipment. Custom round bottom flights can be made and shipped quickly.

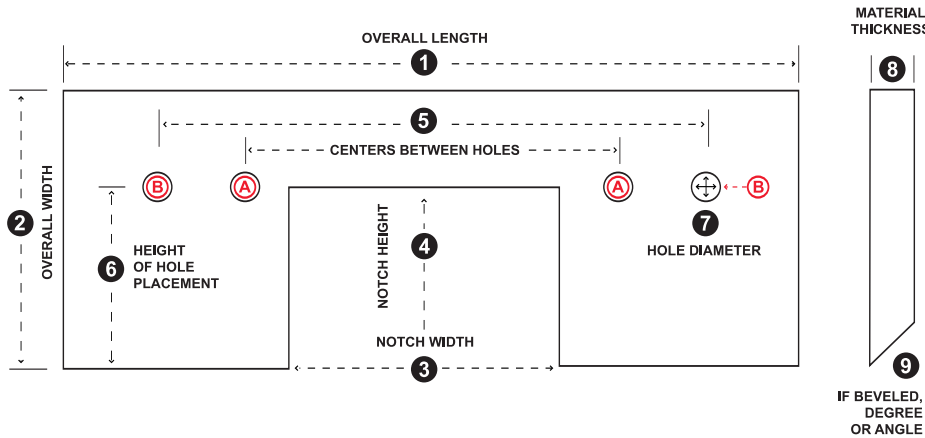

## En Masse Flights

The en masse flight is the most customized flight design. It can vary in height, length and thickness. There are few standardized en masse sizes.

Please fill in the following information and fax back to Maxi-Lift at (972)735-8896.

### USER INFORMATION (Primary Contact)

Name: \_\_\_\_\_

Title: \_\_\_\_\_

Company Name: \_\_\_\_\_

Shipping Address: \_\_\_\_\_

\_\_\_\_\_

City: \_\_\_\_\_

State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email Address: \_\_\_\_\_

Website: \_\_\_\_\_

### DRAG FLIGHT SPECIFICATIONS

Please Check One:

ROUND BOTTOM: \_\_\_\_\_ EN MASSE \_\_\_\_\_

1 Overall Length: \_\_\_\_\_

2 Overall Width: \_\_\_\_\_

3 Notch Width: \_\_\_\_\_

4 Notch Height: \_\_\_\_\_

5 Centers Between the Holes:

Round Bottom: \_\_\_\_\_

En Masse (A) \_\_\_\_\_ (B) \_\_\_\_\_

(A) \_\_\_\_\_ (B) \_\_\_\_\_

6 Height of Hole Placement: \_\_\_\_\_

7 Hole Diameter: \_\_\_\_\_

8 Material Thickness: \_\_\_\_\_

9 If Beveled, Degree or Angle: \_\_\_\_\_

10 Round Bottom, Radius: \_\_\_\_\_

11 Corner, Radius: \_\_\_\_\_

12 Material Type (Check One):

Virgin UHMW \_\_\_\_\_ Nylon \_\_\_\_\_

Reprocessed UHMW \_\_\_\_\_

Other \_\_\_\_\_

13 Manufacturer Name (If Known): \_\_\_\_\_

\_\_\_\_\_

14 Quantity Needed: \_\_\_\_\_

15 Customer Part Number: \_\_\_\_\_

Other Info: \_\_\_\_\_

Call Today: 1-800-527-0657 or Visit Us Online at: [www.maxilift.com](http://www.maxilift.com)

16400 Midway Rd Dallas, TX 75001 • Ph: (972)735-8855 Fx: (972)735-8896 • [info@maxilift.com](mailto:info@maxilift.com)





# CUSTOM FABRICATION OF PLASTIC PARTS

## From Single Prototypes to Large Production Runs

### Custom Fabrication / Made to Order Parts

Maxi-Lift, Inc. manufactures custom made-to-order parts. We carry a huge stock of UHMW sheet, process all of our orders with the latest AutoCAD programs, and utilize the best fabrication equipment to give you the best product for a fair price. We can handle your small custom / prototype orders, or your large production orders.




### Key Industries

- Food Processing
- Agriculture
- Forest Products
- Packaging
- Bottling
- Parcel Handling
- Conveying Equipment
- Waste Water / Sewage Treatment

### Available Parts

- UHMW Angles
- Chute Liners
- Transfer Plates
- Roller Chain Guides
- Table Top Curves
- Diverter Plates
- Hitch Plates
- Wear Strips
- Guide Rails
- Wear Plates
- Conveyor Parts
- Table Surfaces
- Belt Conveyor Wipers
- Drag Conveyor Flights

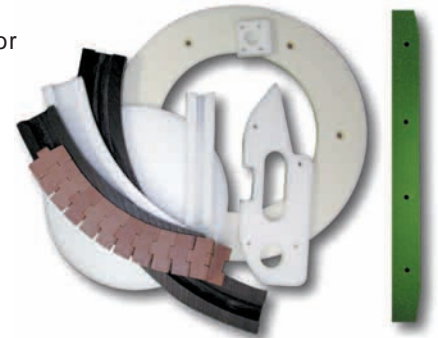

### Wear Strips

Wear strips are typically used in the following applications: chain guide, flat top chain contact guide and dead plates. Material, size and thickness are custom per your specifications. Typically wear strips are made of UHMW, which is available in White Virgin, Black Reprocessed, Green Reprocessed, Black Anti-Static and Black TL Dry-Slide.

### Roller Chain Guides / Custom Curves

Roller chain guides are designed to handle ANSI double pitch chain in packaging and drag chain conveying systems. Also available are custom guides...made just for you, just the way you need. These guides help distribute the load, reduce the friction between surfaces and improve the wear of the chain. UHMW roller chain guides meet FDA/USDA guidelines.

