

STAINLESS, CARBON, and ZINC-PLATED STEEL

ELEVATOR BOLTS

SAME DAY SHIPPING!

With over 10 million Elevator Bolts in inventory, Maxi-Lift is the leader in Elevator Bolts. Maxi-Lift's huge inventories, combined with Same Day Shipping means you get bolts fast. Our quality exceeds all industry standards for Grade 2. All elevator bolts are continually tested to ensure the finest quality.

Special Pricing for Stocking Distributors!




- **Over 10 Million in Stock**
- **23 Sizes, 3 Materials, & Three Different Styles**
- **#1 Norway, Sabre-Tooth, & #3 Reliance**
- **Steel Exceeds All Industry Standards For Grade 2 Elevator Bolts**

Maxi-Lift Inc.®


1.800.527.0657 WWW.MAXILIFT.COM

Standard & Sabre-Tooth Elevator Bolts

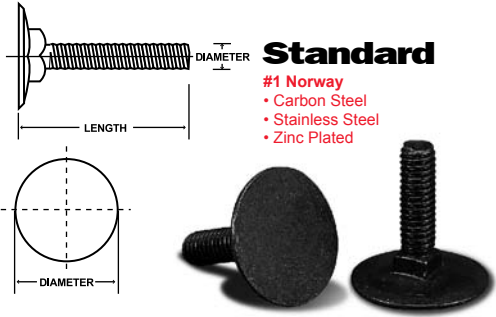


Standard

- #1 Norway
- Carbon Steel
- Stainless Steel
- Zinc Plated

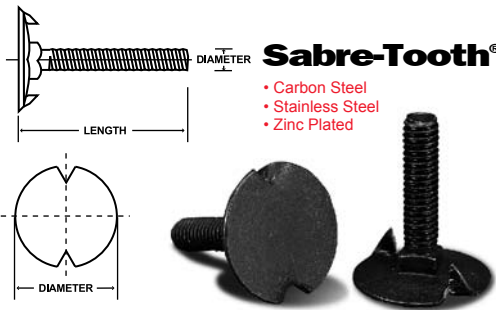

Sabre-Tooth®

- Carbon Steel
- Stainless Steel
- Zinc Plated

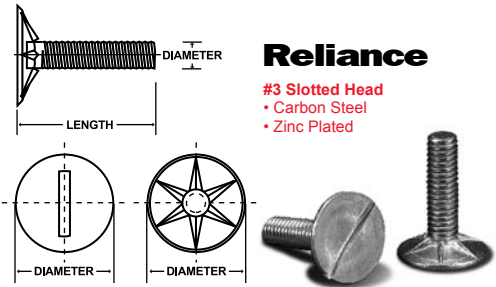

Reliance

- #3 Slotted Head
- Carbon Steel
- Zinc Plated

SIZE, INCHES	WEIGHT PER 100 PCS., LBS.	CASE QUANTITY	KEG BULK QUANTITY
1/4 x 3/4	2.94	1200	2000
1/4 x 1 *	3.24	1200	1700
1/4 x 1-1/4 *	3.43	1200	1500
1/4 x 1-1/2 *	3.73	1200	1300
1/4 x 1-3/4 *	3.98	1200	1200
1/4 x 2 *	4.29	1200	1000
1/4 x 2-1/4	4.88	600	900
1/4 x 2-1/2	4.92	600	800
5/16 x 3/4	4.76	1200	1200
5/16 x 1 *	5.05	1200	1000
5/16 x 1-1/4 *	5.55	1200	900
5/16 x 1-1/2 *	6.38	600	800
5/16 x 1-3/4 *	6.50	600	700
5/16 x 2 *	7.12	600	600
5/16 x 2-1/4	7.43	600	550
5/16 x 2-1/2	7.78	600	500
3/8 x 1-1/4	6.54	600	750
3/8 x 1-1/2	7.10	600	700
3/8 x 1-3/4	7.66	600	600
3/8 x 2 *	8.31	600	500
3/8 x 2-1/4	9.35	600	450
3/8 x 2-1/2	9.83	600	400
3/8 x 3	10.79	600	300

* Stainless Steel

Reliance Elevator Bolts


SIZE, INCHES	WEIGHT PER 100 PCS., LBS.	CASE QUANTITY	KEG BULK QUANTITY
1/4 x 3/4	2.70	1200	2400
1/4 x 1	2.90	1200	2400
1/4 x 1-1/4	3.00	1200	1800
1/4 x 1-1/2	3.50	1200	1800
5/16 x 1-1/4	4.90	1200	1200

Maxi-Lift exceeds all industry standards for grade 2 elevator bolts. Maxi-Lift continually applies metallography tests to our fasteners to ensure the finest quality parts are upheld. ASTM certificates are on file and available upon request.

RECOMMENDED TORQUE FOR ELEVATOR BOLTS				
SHANK DIAMETER	STEEL		STAINLESS	
	IN./LBS.	KGM/M.	IN./LBS.	KGM/M.
1/4"	50	7	86	12
5/16"	96	13	177	25
3/8"	180	25	-	-

Recommended Bucket Installation

*A locking device should be used on all elevator bucket installations.

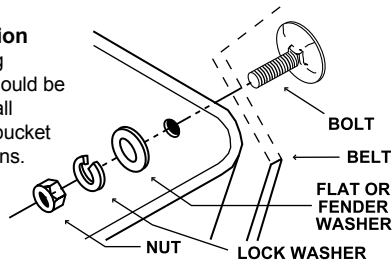

Washers, Nuts & Spacers (1/4", 5/16", 3/8")

- Hex Nut
 - Flat Washer
 - Lock Washer
 - Standard & Large Flange Serrated lock
 - Nylon Insert Lock
 - Fender Washer
 - Leather Washer
 - Poly Spacer
 - Neoprene Spacer
-